

Temperature - Humidity Module

APPLICATIONS

Module and probe used for monitoring temperature and humidity.

WIRELESS

Range up to 700 meters (2,300 ft) in open space, from 25 meters (82 ft) to 100 meters (330 ft) indoors, and up to 400 meters (1,312 ft) indoors with 3 repeaters.

DATA LOGGING

Memory for 3,000 temperature measurements in wireless module memory (equivalent to 3 weeks of readings with a measurement every 10 minutes).

SERVICE DISCOVERY PROTOCOL (SDP)

Cobalt 2 setup is automatic.

Simply press the button on the Cobalt 2 module for 3 seconds to connect it with your wireless receiver. If the wireless signal is not optimal, Cobalt 2 seeks a better path by using other Cobalt modules to relay its signal to the receiver.

(starting with Thermo-Server software Version 4.1)



A cost-effective solution for monitoring temperature/humidity in your storage areas.

Cobalt 2 is the industry's leading battery powered remote temperature monitoring solution. Cobalt 2 is an end-to-end wireless solution for remote temperature and sensor monitoring.

The Cobalt 2 system is easy to install and easy to use. Since it is wireless, no cabling is required. It lets you measure storage temperatures for temperature-sensitive products accurately, remotely and in real-time. Cobalt 2 checks temperature automatically, stores temperature data for tracking and traceability purposes, and alerts you in case anomalies are detected.

This wireless module is designed to be installed on the outside of a stability chamber or storage area, or in a cold room.

Cobalt collects and stores temperature data at regular intervals, transmitting it wirelessly to a PC running the system management software. This software also handles alarms and data storage, giving you a fast and easy way to see all your measurements and anomalies in just a few clicks.

- **Measured temperature range:** from -40°C to +100°C and 0% to 100% Relative Humidity.
- **Battery operated:** up to 2 years autonomy depending on use (battery model: LS17500 Saft Mazda 3.6V Lithium, p/n COB03400000)
- **Wireless module mount:** includes double-sided Velcro® or magnetic adhesive on wall bracket back
- **ISM (Industrial Scientific Medical) band with 3 frequencies:** US/CAN 915 MHz, Europe 868 MHz, APAC 434 MHz

- FCC 15 compliant: CE EN-300-220
- Channel width: 50 kHz
- Frequency deflection: 16 KHz
- Transmission speed: 9600 Baud in NRZ mode
- Modulation type: GFSK
- Driven receiver sensitivity for BER= 1%: from -107dbm to -110 dbm
- Driven transmission: from 8 dbm to 10 dbm
- Power output: 25 mW

Plastic enclosure: ABS and Polycarbonate

Temperature range for exposure of the module (functioning of the electronics of the radio module): 0°C to 50°C (32° to 122°F). 0 to 90% RH non-condensing.

Protection index: IP65.

Depending on usage, battery change may be required between 1 and 3 years of operation. Cobalt notifies you approximately two months before the end of battery life (when 10% battery life remains). You may change your own batteries or have it done by OCEASOFT or another qualified technician.

Size: 132.74 x 64.15 x 34 mm (5.2 x 2.5 x 1.3 in)

ON-DEMAND TEMPERATURE READING

Following a short press on the green button, Cobalt 2 reads the sensor immediately. On devices with two sensors, such as temperature/humidity sensors, the temperature reading on the first sensor is displayed for 3 seconds. Press the button again to read the second sensor.

CALIBRATION MANAGEMENT

Simplified calibration using digital sensor only, without wireless module, as Cobalt 2 is not on the measurement channel.

ROBUST SOLUTION

Digital technology sensor is insensitive to interference thanks to the use of error-correcting code and CRC (checksum).


FIND OUT MORE

Get more information on any of our products or services by visiting our Web site: www.oceasoftware.com

Large LCD Display




 Alarm icon

 Battery level indicator

 Performance indicator: wireless range (RSSI)

 Most recent temperature / humidity reading

 Display text: this customizable text shows the sensor name, as well as various alert messages, such as "Sensor Fail", "Low Bat", "High Value", etc.



Spontaneous alarms.

The device sends an alarm to the Thermo-Server software (thus to the user) in case values exceed pre-determined upper or lower thresholds. Cobalt includes the ability to send spontaneous alarms with additional information:

- **Sensor failure:** For example, if a probe is disconnected, Cobalt attempts to establish communication with its sensor. If connection is not possible, a technical alarm is sent. The user is thus notified immediately if there is a problem getting readings.
- **Low battery:** When the battery-life counter reaches 10%, a technical alarm is automatically sent to let the user know that the battery needs to be changed soon.

DIGITAL TEMPERATURE-HUMIDITY PROBE

- **Measured temperature/humidity range:** From -40°C to +100°C (-40°F to +212°F) and 0 to 100% RH
- **Probe type:** Digital probe with 4 leads
- **Probe dimensions:** 67 mm x 12 mm plastic casing with PTFE filter
- **Cable length:** 0.80 m (2.6 ft)
- **Connector:** connector with 4 gold-plated pins between probe and radio module
- **Temperature measurement uncertainty:** +/- 0.3°C without calibration and +/- 0.15°C after calibration (+10°C to +40°C)
- **Humidity measurement uncertainty:** +/- 2% RH after calibration (10% to 90% RH)
- **Resolution:** 0.0625°C and 0.1% RH
- **Calibration certificate:** NF EN ISO/CEI 17025

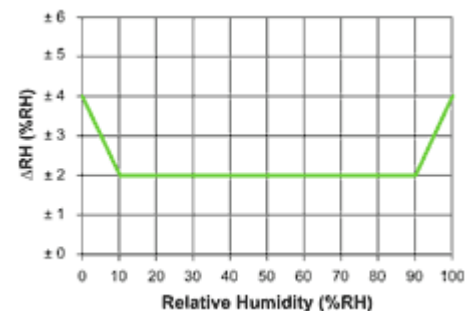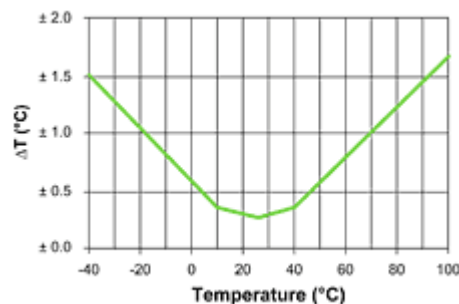

OCEASOFT

Bat 4, Parc club du Millénaire – 1025 rue Henri Becquerel
34000 Montpellier, France
www.oceasoftware.com info@oceasoftware.com



More than monitoring